




GATEWAY LLC
COMPOSITES

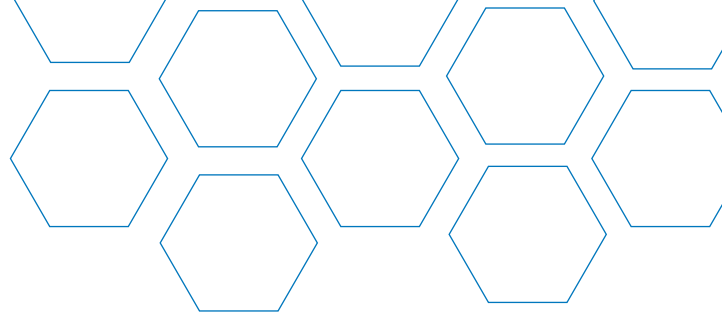

PW350 Plain Weave Carbon 350g/m² – 10oz/yd²

GCCF12KPW350 is a plain weave, high strength, non corrosive carbon fiber fabric oriented in the 0° and 90° directions. The fabric is field laminated with a resin system to create a carbon fiber reinforced polymer (CFRP) system to reinforce structures such as buildings, parking garages, tanks, pipes, bridges, stacks and piling including walls (poured and masonry), columns, beams, slabs and pile elements.

Product ID:	GCCF12KPW350-24
Description:	12K Carbon Fabric, Plain Weave, 350 gsm
Raw Material:	12K Carbon Fiber
Weave:	Plain Weave
Construction	6.0 epi (±0.5) x 6.0 ppi (±0.5)
Carbon Weight:	350 gsm (±25 gsm) (10.3 oz/yd ² ± 0.8)
Width*:	12, 24 inch (±0.5 inch)
Edge Type:	Aramid Leno @ Selvege
Std. Roll Size:	100 linear yard

PROPERTIES

Carbon Fiber Properties (Lot Average)

	English	Metric
Tensile Strength	≥700 ksi	≥4963 MPa
Tensile Modulus	≥33.4 msi	≥234 GPa

Cured Laminate Properties*

Tensile Strength (ASTM D3039)	105,000 psi	724 MPa
Tensile Modulus (ASTM D3039)	6,900 ksi	48 GPa
Elongation at Break (ASTM D3039)		1.3%
Thickness (ASTM D3039)	.022 in	0.56 mm

"Carbon Fiber Properties" are confirmed by Certificate from the fiber manufacturer. "Cured Laminate Properties" are typical. The properties do not constitute any warranty or guarantee. All values are for material selection purposes only. The customer must determine suitability of any information or material for any contemplated use and assumes all risk. This information is for use by technically skilled persons at their own discretion and risk.

120 East Hwy A
Wentzville MO 63385
636.887.0637

Fax: 636.548.2288
info@gatewaycomposites.com
gatewaycomposites.com

